

Instruction Manual

Tilting Container




Note: The Owner/Operator must read carefully and understand all the information presented here before operation.

THANK YOU FOR CHOOSING OUR TILTING CONTAINER. FOR YOUR SAFETY AND CORRECT OPERATION, PLEASE CAREFULLY READ THE MANUAL BEFORE USE.

NOTE: All of the information reported herein is based on data available at the time of printing. The factory reserves the right to modify its own products at any time without notice or incurring in any sanction. Please verify with the factory for possible updates.

ZC series is a container for forklift or hand move. It is used to transport material with forklift or you can move it by your hand with the wheels.

1. SPECIFICATION

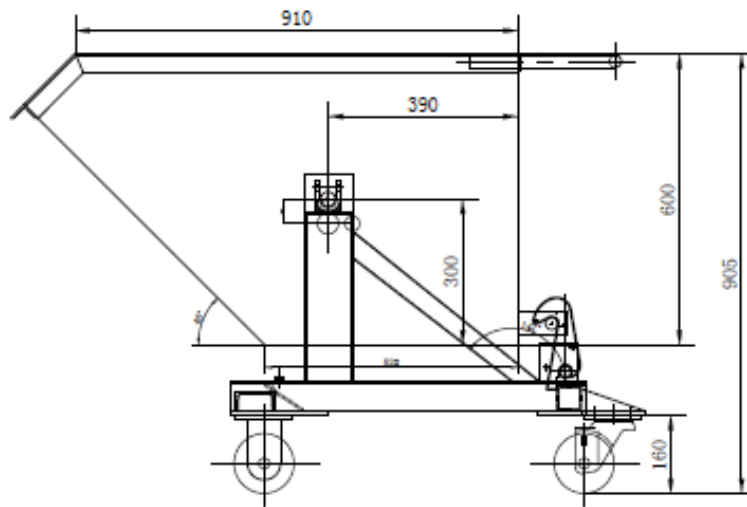

Model	DIMENSIONS (LXWXH)	Capacity (KG)	VOLUME (L)	WEIGHT (KG)
AR-J150	1160*750*800	1500	300	95

2. PACKING

This product is packed with the carton or steel packing. When open the packing, please check carefully whether it is good or has other problem. If it is damaged, please fill in the list to mail provider and recode the model you bought.

3. CAUTIONS

WARNING: Please pay attention to the operation as follows for using correctly.

- (1) The container can be emptied at any height by cable operated from the driver's seat
- (2) It is dangerous to stand near the container when it is dumping, so please sit in the fork lift to operate it.
- (3) Please do not overload

4. OPERATING INSTRUCTION

- (1) Place unit on floor or flat surface easily accessible to fork truck. Be sure that "T" bolts are sufficiently unthreaded to allow forks to enter pockets.
- (2) Carefully slide forks (do not use fork extensions) into container's fork pockets. Be sure forks are in pockets as far as possible.
- (3) Hand tighten "T" bolts to secure unit to forks (hand tool may be used but is not necessary). Recheck bolts periodically during use for tightness.

5. MAINTENANCE

Lubricate moving parts periodically

6. FOR WARRANTY SERVICE

If unit does not work properly, contact your dealer or the factory for units less than ninety days old.

7. FOR NON-WARRANTY SERVICE

For units older than ninety days, repairs can be made easily with factory authorized parts.

NOTE: Do not send units to the factory for service without obtaining a "returned goods authorization number" from the service department. We will not be responsible for goods returned without proper authorization.